



HKS 3-1, 210"

HKS 3-1, 210"
High-speed Tricot Machine
高速特里科机器



KARL MAYER





ITMA 2011
www.itma.com
22-29 September
Fira de Barcelona
Barcelona, Spain

HKS 3-1


The highly productive machine for elastic and rigid structures

生产弹性和非弹性结构的高产量机器

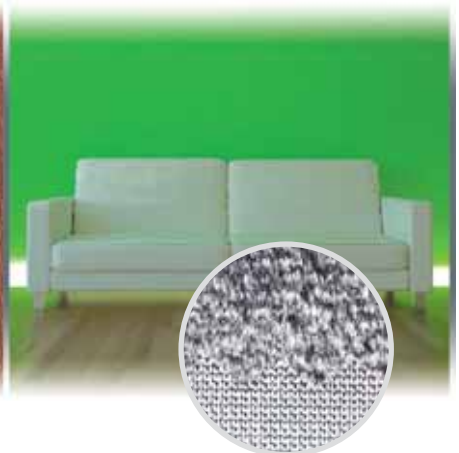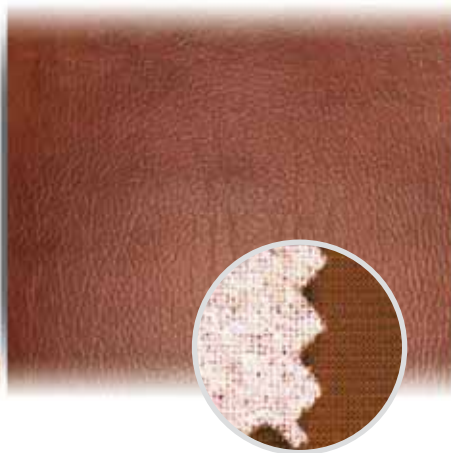

This highly productive machine for elastic and rigid structures is especially developed for the production of elastic nettings for sportswear, light velour fabrics for home textile applications as well as ground structures for artificial leather.

生产弹性和非弹性结构的高产量机器专为生产运动服弹力网眼、轻质的绒类家纺织物和人造皮毛的底布而开发。

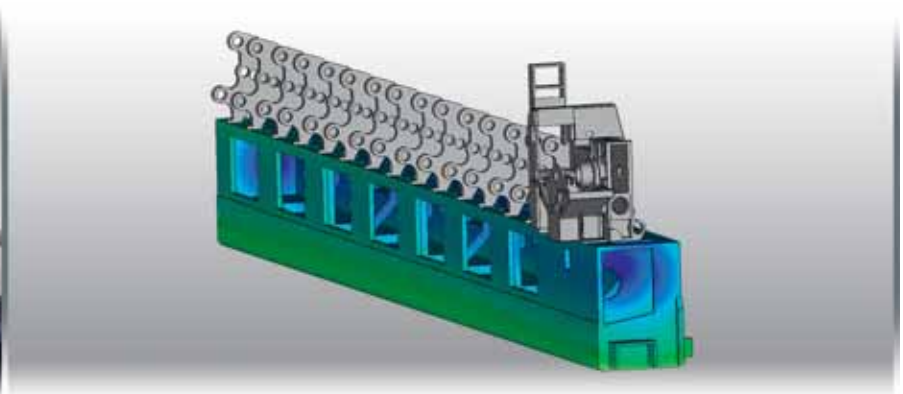

Machine construction optimized for 210" allowing increased production. Carbon fibre bars guarantee low temperature dependency with stable running conditions in high width and/or gauges.

机器结构为配合 210" 的机宽而进行了优化，这提升了织物产量。碳纤维梳栉确保大幅宽和/或高机号机器的稳定运行不受温度变化影响。

Bars Carbon fibre reinforced plastics
Gauges E28, E32
Machine widths 210"
Applications basic rigid and elastic fabrics, automotive headliner, lingerie
Max lappings GB 1: 1-0/8-9// (8 needles)
 GB 2: 1-0/6-7// (6 needles)
 GB 3: 1-0/3-4// (3 needles)
Courses/cm take-up min. 10 courses/cm (plain)

梳栉 碳纤维增强塑料
机号 E28, E32
机器幅宽 210"
应用 弹性或非弹性织物，汽车顶蓬，内衣
最大垫纱 GB 1: 1-0/8-9// (8 针)
 GB 2: 1-0/6-7// (6 针)
 GB 3: 1-0/3-4// (3 针)
横列/cm 牵拉 最小 10 横列/cm (平纹)



KARL MAYER